

Stay Connected Anywhere

CR202 Portable 4G Router

· 4G

· Wi-Fi

· Built-in battery



· Cloud-Managed

The CR202 is a versatile cellular router that integrates various network access technologies, including 4G, Wi-Fi, and wired connections. This integration empowers the router with powerful network access capabilities, providing a high-speed data pathway in any scenario. Adding to its flexibility, the CR202 is equipped with a built-in 5000mAh lithium battery, ensuring consistent network connectivity wherever you go. This portable feature enables users to relish uninterrupted and high-speed network access at any time and from anywhere.

Combined with the InHand Device Manager cloud management platform, the CR202 offers customers straightforward remote management services to empower your core business.







Features and Advantages

Convenient Network Access

The CR202 boasts versatile network access capabilities, encompassing cellular, wired, and Wi-Fi connectivity, making it suitable for diverse network scenarios. This ensures the provision of convenient and efficient network access services.



"Always-on" connectivity

The CR202 is equipped with advanced features such as link backup, link detection, dual SIM switching, optional eSIM, and more, ensuring a reliable and robust connection. These features are designed to guarantee network stability and reliability for your connectivity needs.




Compact and Portable

The CR202 showcases a compact, detachable design with a built-in powerful battery. Its portable form factor enables it to deliver network access services anytime and anywhere, catering to both fixed and mobile scenarios with ease.



• Device Manager-Cloud management

The CR202 seamlessly integrates with the Device Manager, enabling real-time management of tens of thousands of distributed devices through a unified cloud platform. Monitor on-site device status anytime, anywhere, streamlining management for enhanced efficiency and cost-effectiveness!









Total Control

Device Details

Cellular Quality

Dimensions (mm)

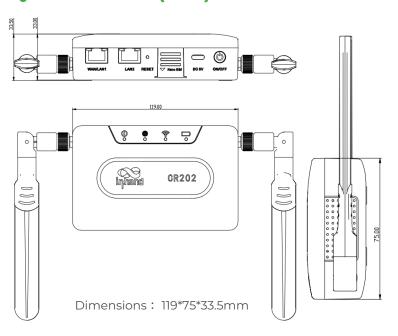





Specifications

CR202 Hardware				
Hardware Platform				
Data Throughput	100Mbps			
Recommended No. of Users	30			
Interface Description				
Cellular	4G LTE CAT6/CAT4 300 Mbps (DL) /50 Mbps (UL)			
Ethernet Port	2 x 10/100Mbps WAN/LAN switchable Dual-LAN			
SIM	1 x SIM, Nano 4FF SIM slot 1 x eSIM (Optional)			
Reset	Reset button			
ON/OFF	ON/OFF button			
Antenna Interface	2*4G Cellular SMA			
Lights	Power/ Cellular/ Wi-Fi/ Battery (Signal)			
Wi-Fi				
Radio Frequency	Single band 2.4GHz			
Max Transmission Bandwidth	300Mbps			
Transfer Protocol	802.11 b/g/n			
Operating Mode	AP/STA mode			
Power Supply				
Power	TYPE-C			
Power Consumption	5V/2A			
Battery				
Battery Capacity	5000mAh			
Lasts up	8 hours			
Mechanical Features				
Installation	Panel Mounting, Wall Mounting			
Dimensions	119*75*33mm			
Weight	265g			
Housing	ABS+PC			
Cooling	Fanless			
Environment				
Working Temperature	-10° C to 50° C (14° F to 122° F)			
Storage Temperature	-20° C to 60° C (-4° F to 140° F)			
Protection Level	IP30			
Certification				
Certificates	FCC, PTCRB, UN38.3, IC, CE, CB, UL*,VZW, ATT, T- MOBILE			
	3 years (Battery: 1 year)			

CR202 Software					
Device Management					
	Centralized management platform				
Device	Simple and intuitive dashboard				
Manager	User-friendly management				
	Multidimensional visual management				
	Network Connection				
Network Access	APN				
Access Authentication	СНАР/РАР				
Network Standard	GSM/EDGE, WCDMA, TDD LTE/FDD LTE				
	The specific frequency bands, please refer to the ordering information table.				
LAN Protocol	ARP				
WAN Protocol	Static IP, PPPoE, DHCP				
Network Protocol					
IP Application	Ping, Trace, DHCP Server, DHCP relay, DHCP Client, DNS relay, DDNS, Telnet				
Routing	Static routing				
NAT	Supports NAT				
Security					
	Stateful Packet Inspection (SPI), DoS attack defense;				
Network	Multicast filter/Ping probe packet, Access Control List				
Security	(ACL);				
	Content URL filter, port mapping, virtual IP mapping, IP- MAC binding				
Data Security	Supports IPSEC VPN, OPENVPN, WireGuard, ZeroTier Supports CA digital certificate				
Reliability					
Link Backup	Supports link backup				
Link Detection	Sends heartbeat packets to detect, auto redials when disconnected				
Dual SIM Failover	Supports dual SIM failover				
Embedded Watchdog	Device runs self-detection, auto recovers from malfunctions				
Network Management					
QoS Management	Bandwidth limit, IP speed limit				
Configuration	Telnet, web, SSH				
Update	Web, DeviceManager				
Log	Local system log, remote log, and serial export of log. Power down saving of important logs.				
SMS Functions	Status query, restart				
Dial-on- demand	Dial-on-demand, data / SMS activation				
Network Management	Supports InHand Device Manager, batch management Add the user experience plan to access The InHand Networks cloud platform to enjoy efficient and convenient services				
Traffic Management	Supports data traffic threshold, traffic statistics and traffic alarm				
Alarm	System restart alarm, LAN port online/offline alarm, data traffic alarm, SIM card failure alarm, etc.				
Maintenance Tools	Ping, route tracking, network speed test				
Status Query	System status, modem status, network connection status, and routing status				

Note: The functions marked with $\mbox{\ensuremath{}^*}$ are not available yet.



Ordering Guide

Model code: CR202- <wmnn>-WLAN-<b na=""></wmnn>			
Model	<wmnn>: Cellular Types & Modules</wmnn>	WLAN: Wi-Fi	<b na="">:Battery
CR202-CNC4-WLAN- <b na="">	China LTE-FDD: B1/3/5/8 LTE-TDD: B34/38/39/40/41 WCDMA: B1/5/8 GSM/EDGE: B3/8	WLAN: Wi-Fi	B: Battery <na>: No battery</na>
CR202-NAC6-WLAN- <b na="">	North America LTE-FDD: B2/4/5/7/12/13/25/26/29/30/66 WCDMA: B2/4/5	WLAN: Wi-Fi	B: Battery <na>: No battery</na>
CR202-EUC4-WLAN- <b na="">	Europe/APAC LTE-FDD: B1/3/5/7/8/20/28 LTE-TDD: B38/40/41 WCDMA: B1/5/8 GSM/EDGE: B3/8	WLAN: Wi-Fi	B: Battery <na>: No battery</na>

Example: CR202-NAC6-WLAN-B: CR202 series cellular router, supporting FDD, WCDMA, networks, with Wi-Fi AP&Client modes, and equipped with a battery.

Note: Users are asked to join InHand User Experience Plan at first time login. If user agreed to join, the router will connect to InHand DeviceManager portal. If users want to disable it, please go to Services->User Experience Plan to change the setting.

InHand Cloud-Managed Networking Solution

Our solution encompasses cloud-managed 4G cellular routers, 5G FWA/ODU cellular routers, Wi-Fi access points, switches, and the InCloud Manager SaaS. By integrating top-tier IT management, IoT, 5G, and other technologies, we provide fast, secure, and user-friendly network solutions globally, enabling businesses to unlock boundless growth opportunities.



InCloud Manager

- Centralized management
- Efficient zero touch deployment
- Simplified network configuration
- Multi-dimensional security
- Multiple intelligent strategies



5G FWA02

- High-speed 5G, DL 4.76Gbps, UL 1.25Gbps
- 802.11ax, maximum speed 3600Mbps
- 2.5G ETH, WAN/LAN
- Link backup, cellular failover, load balancing
- Wall and desktop installation



5G Outdoor Unit

- High-speed 5G, DL 4.76Gbps, UL 1.25Gbps
- 2Gbps throughput
- 2.5G ETH, WAN/LAN, PoE
- IP67, -30~70° C, GPS
- Wall & pole mounting with adjustable angles

About Us

In Hand Networks is a leading IoT solutions provider founded in 2001, dedicated to driving digital transformation across industries and empowering customers to unlock their full potential and achieve accelerated growth.

We specialize in delivering industrial-grade connectivity solutions for diverse sectors, such as enterprise networks, industrial and building IoT, digital energy, smart commerce, and mobility. Our comprehensive product portfolio and services cater to various applications worldwide, including smart manufacturing, smart grid, intelligent transportation, smart retail, etc. With a global footprint spanning over 60 countries, we serve customers in China, the United States, France, Germany, the United Kingdom, Italy, and beyond.



43671 Trade Center Place, Suite 100, Dulles, VA 20166, USA T: +1 (703) 348-2988 E: info@inhandnetworks.com www.inhandnetworks.com