


Connect beyond Boundaries

## 5G ODU2002 Outdoor Unit

- 5G
- Outdoor IP67
- Cloud-Managed
- Security

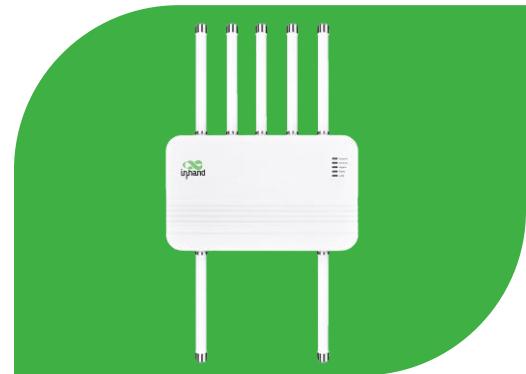

5G cellular technology revolutionizes network flexibility and convenience, enabling enterprises to effortlessly establish high-speed connectivity within minutes. This advancement not only enhances operational efficiency but also elevates competitiveness in digital business development.

Across bustling cities, remote villages, outdoor settings, and challenging conditions, InHand cloud-managed 5G ODU ensures reliable high-speed access and robust protection, delivering a global network that is fast, convenient, efficient, and secure.

Paired with the InCloud Manager, InHand offers a completely cloud-managed networking solution to enable zero-touch deployment, remote configuration, and visualized monitoring, thus reducing management costs and increasing efficiency to achieve rapid business growth.



## Features and Advantages

### • Unleash the Power of 5G

The ODU2002 brings you high-speed Internet without waiting. With blazing-fast 5G, download speeds of up to 4.76Gbps, upload speeds of up to 1.25Gbps, and the ability to fall back to high-speed LTE Cat 19.



### • Worry-free Connectivity

The ODU2002 ensures "always-online" connectivity with features like 5G/wired backup, cellular failover, dual SIM switching, optional eSIM, and fault self-recovery. This guarantees network stability and minimizes the risk of network failure.




### • Harsh Outdoor Environments

The ODU2002 boasts an IP67 rating, with wide temperature tolerance. It offers GPS, PoE power reception, an external high-performance 5G antenna, and flexible wall/pole installation. These features ensure exceptional performance, especially in challenging outdoor environments.




### • Cloud-Managed Networking Solution


The 5G ODU, paired with the InCloud Manager, empowers effortless cloud management of distributed sites at scale. Enjoy real-time network monitoring and heightened management efficiency from any location, breaking free from constraints.

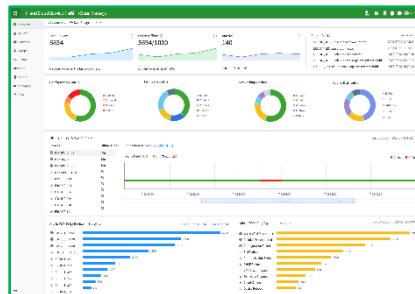

Centralized Management



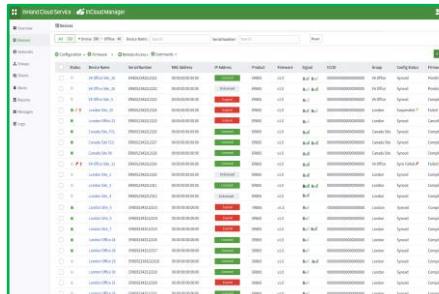


Real-time Monitoring

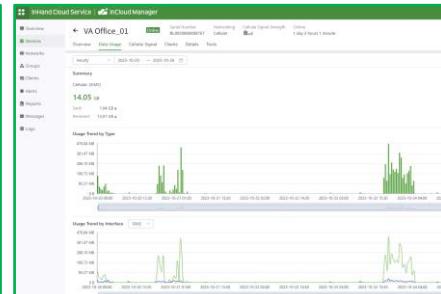

Visualized Network

## Dimensions

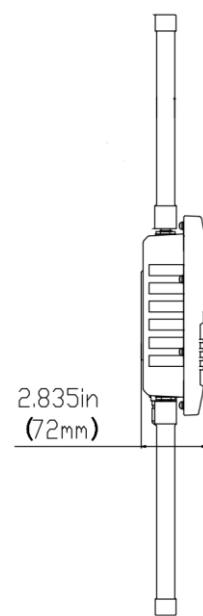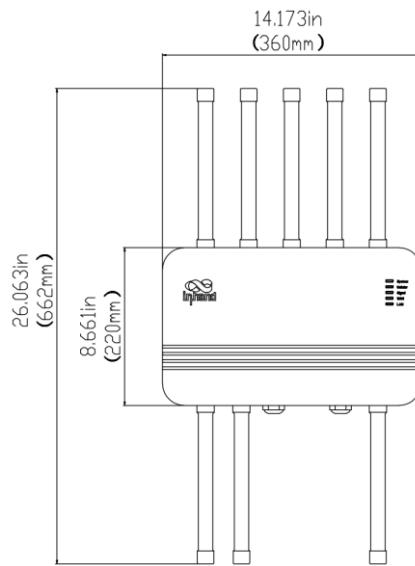

Antenna

Dimensions: 14.17 \* 8.66 \* 26.06(in) / 360 \* 220 \* 72(mm)

# Product Specifications

5G ODU2002 Hardware Specifications				5G ODU2002 Software Specifications		
Hardware Platform				Cloud Management		
Throughput	Up to 2Gbps	Recommended No. of Users	200	InCloud Manager	Centralized management platform Simple and intuitive dashboard User-friendly management Batch upgrade and management	
Interfaces				Uplink Management		
Ethernet Port	2*2.5 GbE RJ45; WAN/LAN switchable, Dual-LAN PoE in LAN Port		USB	Network Access	Multiple network access, 5G/4G cellular network access, ETH network access	
USB	1*Type-C 2.0	GNSS	GPS/GLONASS/Beidou/Galileo/QZSS	Dial-up Service	PPPoE, cellular automatic redial, dual SIM switching, APN configuration	
SIM	2*SIM, Nano 4FF SIM slot, Hot plug	RESET	Reset button	Smart Link	Link backup Packet-by-packet load balancing among multiple links Real-time detection of link delay, jitter, and packet loss Supports link priority adjustment	
Ground Terminal	1*GND	Lights	System, Cellular, Signal, WAN, LAN	Security		
Antenna Interface	TNC-type connectors; 6*Sub 6, 1*GNSS, 1*Wi-Fi		Cellular Rate	VPN	IPSec VPN, L2TP VPN	
Cellular	5G: 4.76Gbps (DL)/1.25Gbps (UL) 4G: 1.6Gbps (DL)/200Mbps (UL)		5G Antenna Freq. Range	Firewall	Access control, port mapping, port forwarding, MAC address filtering Firewall filtering based on MAC, IP, port, and protocol	
5G Antenna Gain	6.46 dBi		Monitoring & Alerts			
Wi-Fi		Radio Frequency	Single band 2.4GHz	Dashboard	Device information, interface status, and refined traffic	
Transfer Protocol	802.11 b/g/n	Maximum Output Power	17dBm	Link Monitoring	Link delay, jitter, packet loss, and throughput monitoring	
Power Supply		Power	Power over Ethernet (PoE) - 802.3at	Cellular Signal	Real-time view of cellular signal strength, RSSI, RSRP, RSRQ, SINR, etc.	
Power	Power over Ethernet (PoE) - 802.3at	Power Consumption	≤15W	Data Security	System logs, diagnostic logs, device events, email alerts	
Mechanical Features		Dimensions & Weight		Network Functions		
Installation	Wall mounting, pole mounting	Dimensions & Weight	360 * 220 * 72(mm), 14.17 * 8.66 * 20.06(in) 2.87kg	IP Protocol	IPv4/IPv6	
Housing & Cooling	Metal & Fanless			IP Application	VLAN, DHCP server/client, DNS, DDNS, Fixed Address Assignment, IP Passthrough	
Environment		Storage Temp.	-40° C to 85° C (-40° F to 185° F)	Interface Management	Duplex mode, link negotiation rate, interface enable	
Working Temp.	-30° C to 70° C (-22° F to 158° F)	Ingress Protection	IP67	Wi-Fi	Supports 2.4G Wi-Fi	
Humidity	5% to 95% (non-condensing)			Policy Management	Policy Routing, Traffic Shaping	
Salt Mist	IEC60068-2-52			Self Recovery	Built-in software and hardware watchdog, self-healing equipment operation failure, to ensure the equipment maintains high availability	
EMC				Remote Maintenance		
Electrostatic Discharge Immunity	EN61000-4-2, level 3	RFI Radio Frequency Immunity	EN61000-4-3, level 3	Remote Access Control	Supports Web UI / CLI remote access and control	
Electrical Fast Transient/Burst Immunity	EN61000-4-4, level 3	Surge	EN61000-4-, level 3	Cloud Connection	Remote maintenance of PCs, monitoring equipment, servers, etc.	
Immunity to Conducted Disturbances	EN61000-4-6, level 3	RE/CE	Class A, Margin 3dB	Network Diagnostics	Ping, Traceroute, network packet capture tools, diagnostic logs	
Physical Properties				Configuration Backup	Supports configuration import and export	
Shockproof	IEC60068-2-27	Vibration Resistance	IEC60068-2-6			
Free Fall	IEC60068-2-32					
Certification						
Certification	FCC, IC, PTCRB, Verizon, T-Mobile, CE	Warranty	3 years			

## Ordering Guide

Model	Model code: ODU2002-<WMNN>
	<WMNN>: Type & Module
ODU2002-NAVA	(For North America, Verizon) 5G Sub 6: n2/5/7/12/14/25/30/41/48/66/71/77/78 LTE-FDD: B2/4/5/7/12/13/14/17/25/26/29/30/66/71 LTE-TDD: B41/46/48 WCDMA: B2/4/5
ODU2002-NATM	(For North America, T-Mobile) 5G Sub 6: n25/41/66/71 LTE FDD: B2/4/5/12/66/71 LTE TDD: B41 LAA:B46
ODU2002-EUNR	(For Europe/Australia/Asia) 5G Sub 6: n1/3/5/7/8/20/28/38/40/41/71/77/78/79 LTE FDD: B1/3/5/7/8/20/28/32/71 LTE TDD: B38/40/41/42/43

## InHand Cloud-Managed Networking Solution

Our solution encompasses cloud-managed edge routers, Wi-Fi 6 AP, switches, 5G FWA/ODU cellular routers, and the InCloud Manager SaaS. By integrating top-tier IT management, IoT, 5G, and other technologies, we provide fast, secure, and user-friendly network solutions globally, enabling businesses to unlock boundless growth opportunities.



### InCloud Manager

- Centralized management
- Efficient zero touch deployment
- Simplified network configuration
- Multi-dimensional security
- Multiple intelligent strategies

### 5G SD-WAN Edge Router

- 5G (Sub 6)/ LTE CAT20
- Multilink Backup & Dual SIM failover
- 5\*Gigabit Ethernet port, dual WAN
- 802.11ac dual-band, 1200Mbps
- SD-WAN, VLAN, VPN networking

### 5G FWA Router

- High-speed 5G, DL 4.76Gbps, UL 1.25Gbps
- 2.5G ETH, WAN/LAN
- Wi-Fi 6, 802.11 ax, 3600Mbps
- Link backup, redundancy, load balancing
- Easy to deploy, easy to install

### About Us

InHand Networks is a leading IoT solutions provider founded in 2001, dedicated to driving digital transformation across industries and empowering customers to unlock their full potential and achieve accelerated growth.

We specialize in delivering industrial-grade connectivity solutions for diverse sectors, such as enterprise networks, industrial and building IoT, digital energy, smart commerce, and mobility. Our comprehensive product portfolio and services cater to various applications worldwide, including smart manufacturing, smart grid, intelligent transportation, smart retail, etc. With a global footprint spanning over 60 countries, we serve customers in China, the United States, France, Germany, the United Kingdom, Italy, and beyond.



43671 Trade Center Place, Suite 100, Dulles, VA 20166, USA  
T: +1 (703) 348-2988  
E: info@inhand.com  
www.inhand.com